



传感器套件

Sensor Kit

内含可利用率误送检测、波动检测、材料断料检测的3种传感器各3套。
各部分的单品（1个）也在销售中。

Spring sensor can be used for material Mis-feed detection, Buckling detection, End of material detection.
The sensor kit includes 3 pcs of each item. All items are also available as single item.

可适用于误送检测装置 **PMC3** 或 **PMD2**。




We'll strongly advise the use of this sensor unit for product ejection detection and automated system.




PMC-3




PMD-2

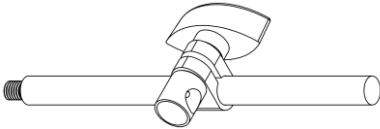No.	品名 Item	型式 Type	数量 Q'ty	備考 Remark	全長 Length
1	绝缘棒 Holder	HD-10A	3		130mm
2	安装夹具 Mounting Bracket	HD-10B	3		178mm
3	“一字”型弹簧传感器 Straight Spring Sensor	SSP-1	3	wire diam. 1mm 	180mm
4	“一字”型弹簧传感器 Straight Spring Sensor	SSP-0.5	3	wire diam. 0.5mm 	165mm
5	“Y型”弹簧传感器 Y-Shape Spring Sensor	YSP-1	1	wire diam. 1mm 	180mm
6	附属传感器线 Accessory Cord		3	0.75 x 3m 蓝,橙,黄 各 1 个 (带有弹簧传感器接头) 0.75 X 3m Blue, Orange, Yellow in one set (with lead spring and pin)	

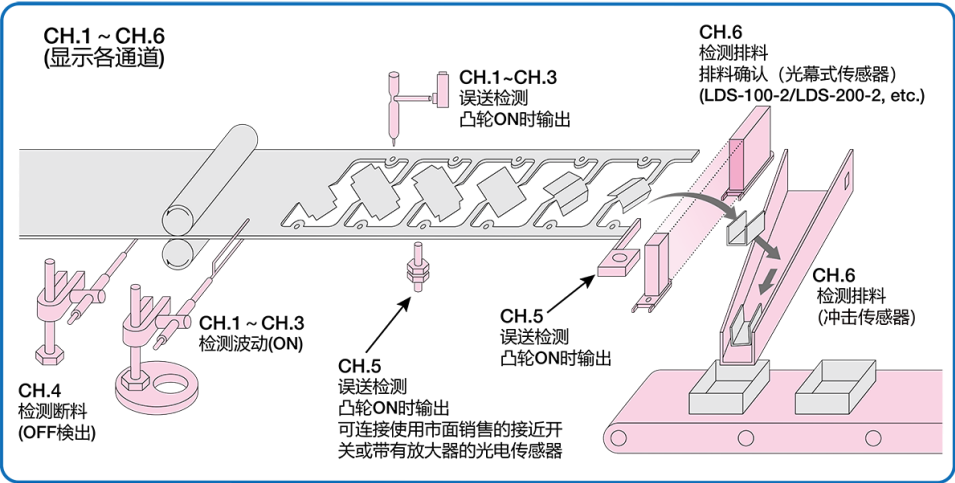


センサー外形寸法図 Dimensions


1. 绝缘棒 / Holder : HD-10A

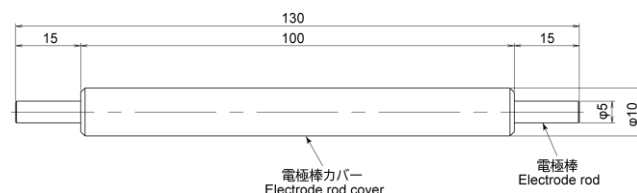



2. 安装夹具/ Mounting Bracket : HD-10B

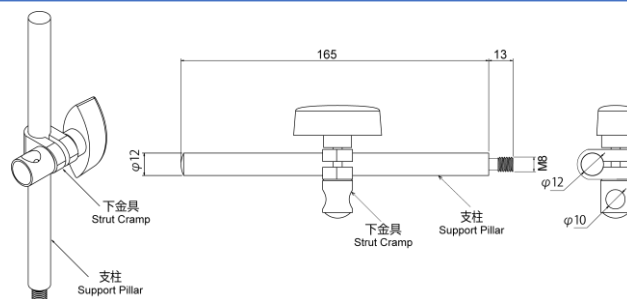



3. “一字”型弹簧传感器/ Straight Spring Sensor SSP-1

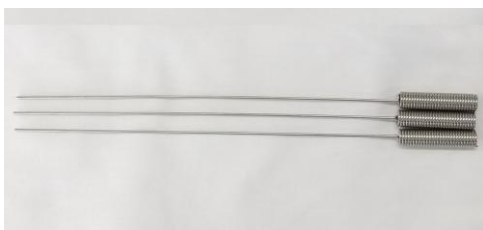

4. “一字”型弹簧传感器/ Straight Spring Sensor SSP-0.5

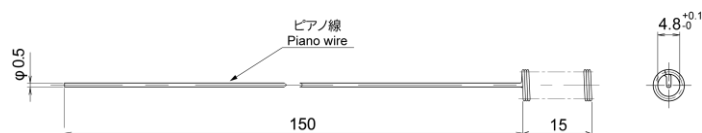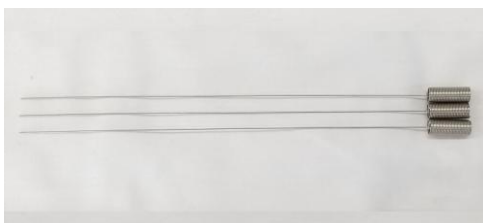

5. Y型” 弹簧传感器/ Y-Shape Spring Sensor YSP-1

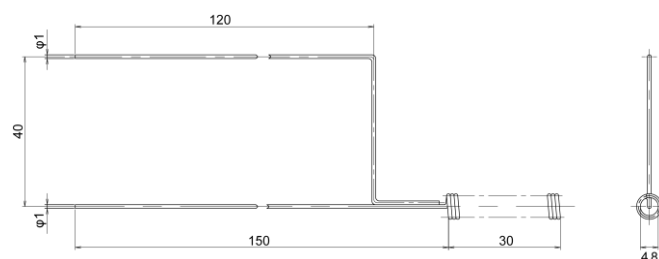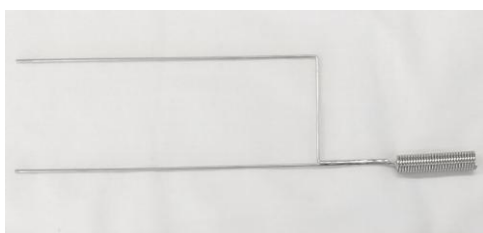

6. 附属传感器线/ Accessory Cord

