



接近传感器

Proximity
Sensor

备选可对应各种各样的模具的多种传感器。
Variety of sensors that meet variety of dies are provided.

可适用于下死点检测装置 MICRON-3
We'll strongly advise the use of this sensor for slug detector.

MICRON-3



传感器延长线
Junction Cable

型式 Model 3RC(3m) / 5RC(5m)

型号 Model
KS-1010C



检测范围 Detection distance
0.8~1.8mm

型号 Model
KS-1010(H)



检测范围 Detection distance
0.8~1.8mm

型号 Model
KS-1310



检测范围 Detection distance
0.5~1.5mm

型号 Model
KS-1310S



检测范围 Detection distance
0.5~1.5mm

型号 Model
MS-1010



检测范围 Detection distance
0.8~1.8mm

型号 Model
KS-1110C



检测范围 Detection distance
0.8~1.8mm

型号 Model
KS-1210C



检测范围 Detection distance
0.8~1.8mm

型号 Model
KS-1410



检测范围 Detection distance
0.5~1.5mm

型号 Model
KS-1410S




检测范围 Detection distance
0.5~1.5mm

型号 Model
KS-1510




检测范围 Detection distance
0.5~1.5mm

型号 Model
MS-2003




备有冷镦机专用传感器。
Sensors for header machines are also available.

安装于模具的示意图
Installation drawing

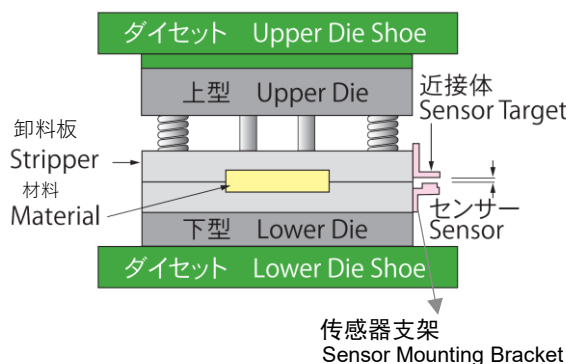

接近体
Sensor Target




传感器安装支架及接近体
Sensor Mounting Bracket and Target

型号 Model JMKS-1




传感器外观尺寸图 Dimensions


KS-1010 (C)

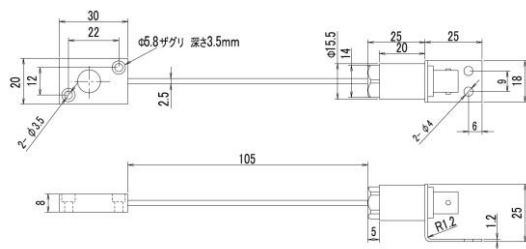


KS-1010 (H)

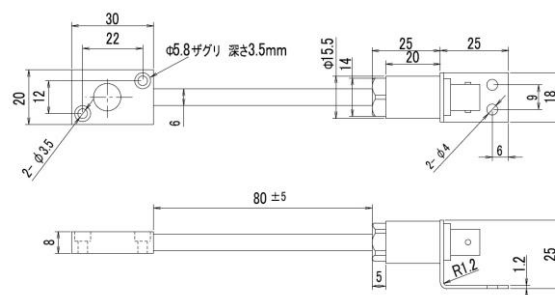


KS-1310

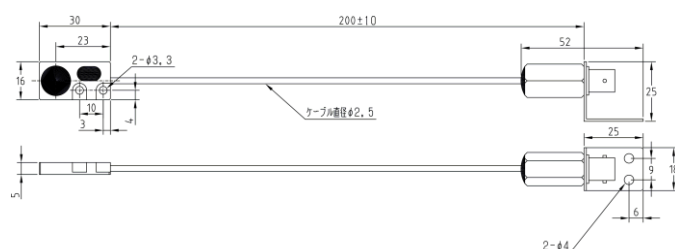


KS-1310S

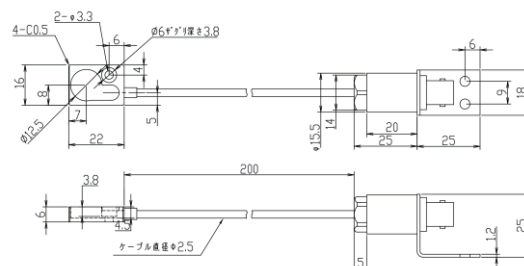


MS-1010

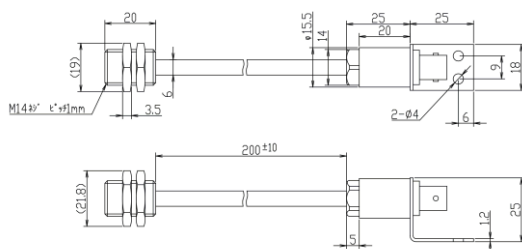


KS-1110C

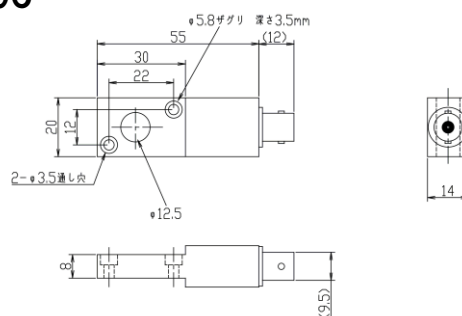


KS-1210C

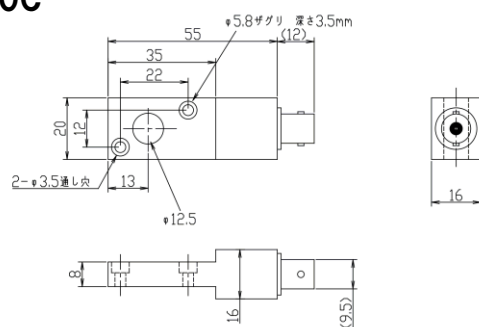

KS-1410



KS-1410S

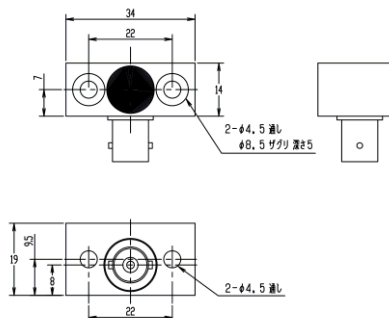

KS-1510

